


Substrate and Mirror Preparation

- 1** Read instructions **completely** before applying Mirro-Mastic®.
- 2** Do not use on a painted surface, wall covering, or treated wood.
- 3** For best adhesion, the mirror, substrate and mastic should be at room temperature (72°F/22°C). Do not apply at a temperature below 59°F (15°C) or above 95°F (35°C).
- 4** Make sure mirror and substrate are free of dust, clean and dry. On nonporous substrates such as glass, tile, or metal, sealing is not necessary. On porous substrates such as drywall or wood, use a quality primer (**not paint**) on the substrate and allow it to dry. Painted surfaces should be sanded through to the original surface and the substrate cleaned and sealed where the mastic is to be applied. Wall coverings should be removed and the substrate cleaned and sealed where the mastic is to be applied.
- 5 PERMANENT MECHANICAL FASTENERS MUST BE USED FOR ALL MIRROR APPLICATIONS.**

Directions for use of Palmer Mirro-Mastic®

- 1** Apply Mirro-Mastic® to the mirror or substrate in a minimum of one (1) golf ball size mound for every square foot of mirror (.0929 square meters). Do not apply mastic too close to the edge to prevent "squeeze out". Place the mounds so space will be left between them when the mirror is installed.
- 2** Press mirror firmly in place making good contact between mirror, mastic and substrate. Mastic should spread to a pat approximately 4½ inches (11.43 cm) in diameter. The mastic needs air circulation to cure properly. Curing time will depend on temperature, humidity, type of substrate and amount of air that can reach the mastic.

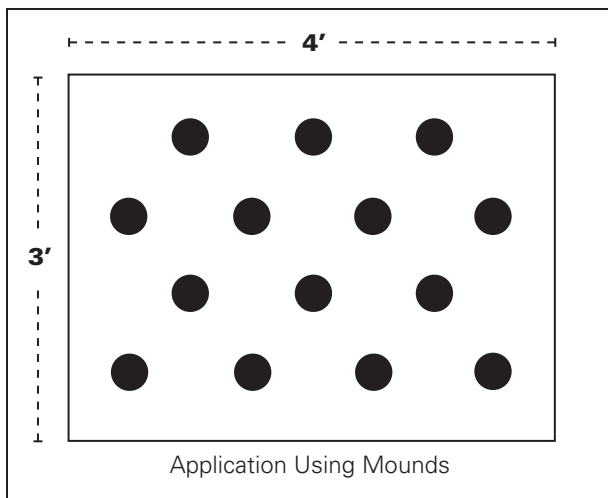

- 3** With minimum coverage, one 5 gallon pail (18.93 L) will install approximately 650 square feet (60 square meters) of mirror. With minimum coverage, one gallon (3.78 L) will install approximately 130 square feet (12 square meters) of mirror. With minimum coverage, one 29 fl oz (858 ml) cartridge will install approximately 28 square feet (2.60 square meters) of mirror. With minimum coverage, one 11 fl oz (325 ml) cartridge will install approximately 10 square feet (.929 square meters) of mirror.
- 4** Cleanup can be done with mineral spirits.
- 5** For ceiling applications or technical questions, contact Palmer Products at 800.431.6151 or palmer@mirro-mastic.com. The SDS and directions in French and Spanish are available at mirro-mastic.com.

NOTE: Palmer Products makes no warranties, express or implied, with respect to Mirro-Mastic® or otherwise, and hereby disclaims any and all warranties, including, without limitation, any implied warranty of merchantability or fitness for a particular purpose. Palmer Products' sole liability and the customer's sole and exclusive remedy with respect to any claim arising out of or relating to either Mirro-Mastic® or the use of Mirro-Mastic®, shall be the replacement of the Mirro-Mastic®. Palmer Products assumes no responsibility if the product is misused.